
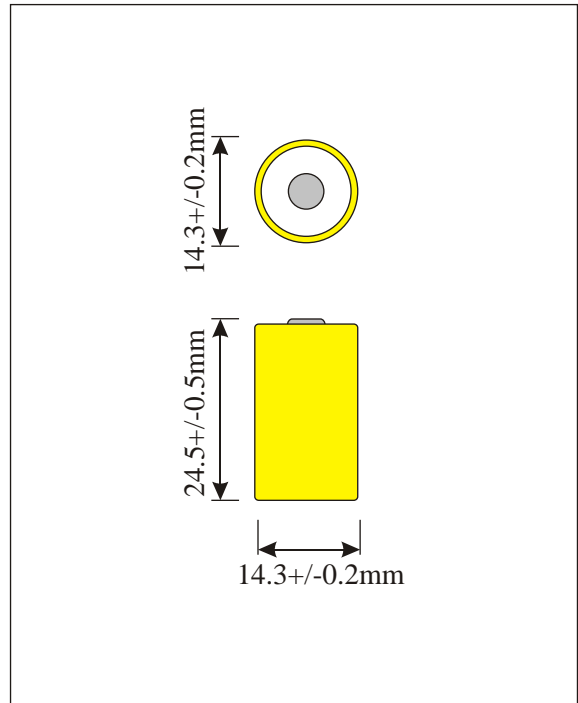


LITHIUM MANGANESE DIOXIDE BATTERY

SPECIFICATIONS

Model	:	CR14250
Description	:	Manganese Dioxide Lithium Battery (LiMnO ₂)
Norminal Capacity	:	600mAh
Nominal Voltage	:	3.0 V
Cut-Off Voltage	:	2.0 V
Weight	:	10 g
Shelf-Life	:	6 years ex-factory
Recommended Drain	:	Standard : 5mA Continuous < 800mA Pulse < 1500mA
Operating Temperature Range	:	-40 to +70 degree C
Service Life	:	23.0hrs at 23mA continuous discharge 11.5hrs at 45mA continuous discharge 5.5 hrs at 90mA continuous discharge
Warning	:	Do not short circuit. Do not recharge. Do not overdischarge. Do not disassemble. Do not put on fire. Do not inverse polarity. Do not mix new and old battery. Do not mix with different battery

Typical Discharge Characteristics

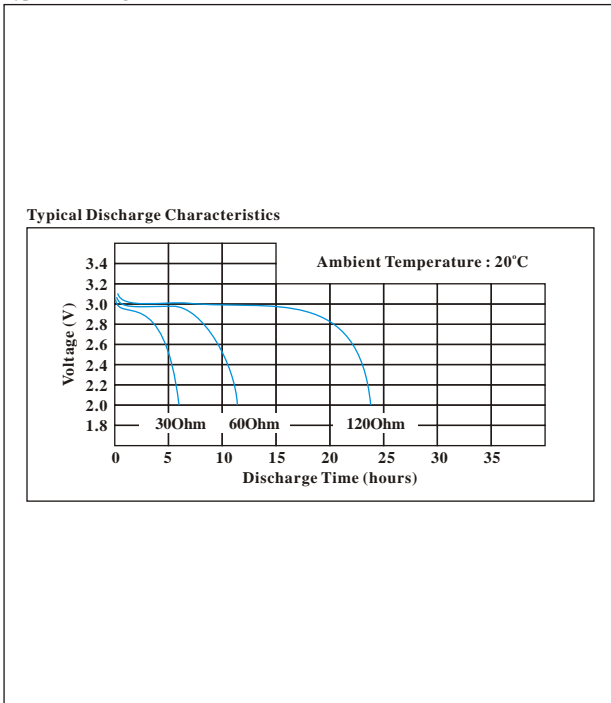

Information is for references only.

Model : CR14250SE
Version : 2.1

GB CELL

ESC02