
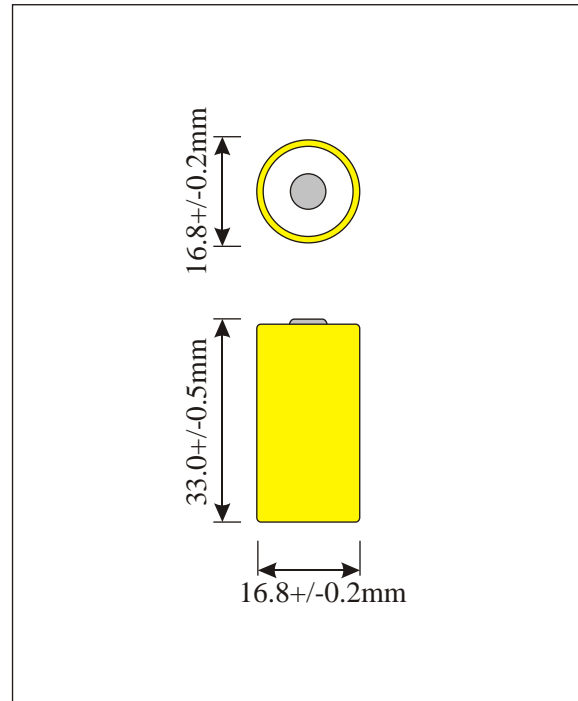


LITHIUM MANGANESE DIOXIDE BATTERY

SPECIFICATIONS

Model	:	CR17335
Description	:	Manganese Dioxide Lithium Battery (LiMnO ₂)
Norminal Capacity	:	1600mAh
Nominal Voltage	:	3.0 V
Cut-Off Voltage	:	2.0 V
Weight	:	19 g
Shelf-Life	:	8 yearsr ex-factory
Recommended Drain	:	Standard : 1mA Continuous < 1500mA Pulse < 3000mA
Operating Temperature Range	:	-40 to +60 degree C
Service Life	:	2.3hrs at 500mA continuous discharge 145hrs at 10mA continuous discharge 1600 hrs at 1mA continuous discharge
Warning	:	Do not short circuit. Do not recharge. Do not overdischarge. Do not disassemble. Do not put on fire. Do not inverse polarity. Do not mix new and old battery. Do not mix with different battery

Typical Discharge Characteristics

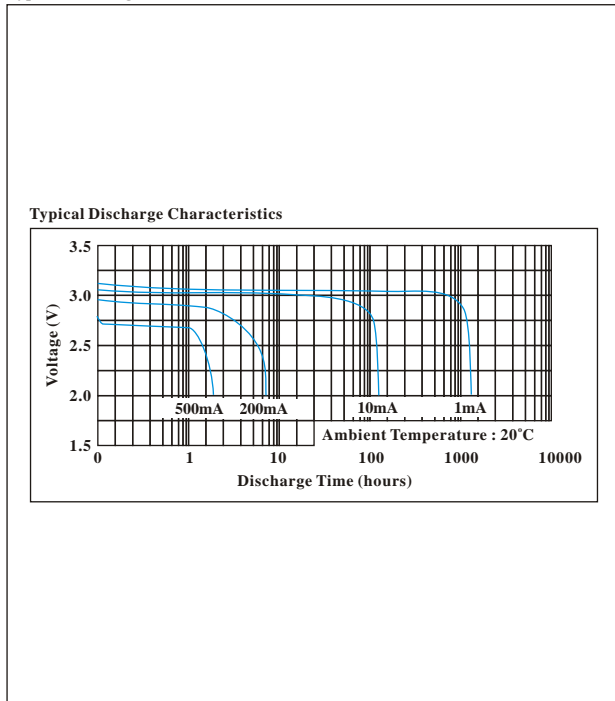

Information is for references only.