
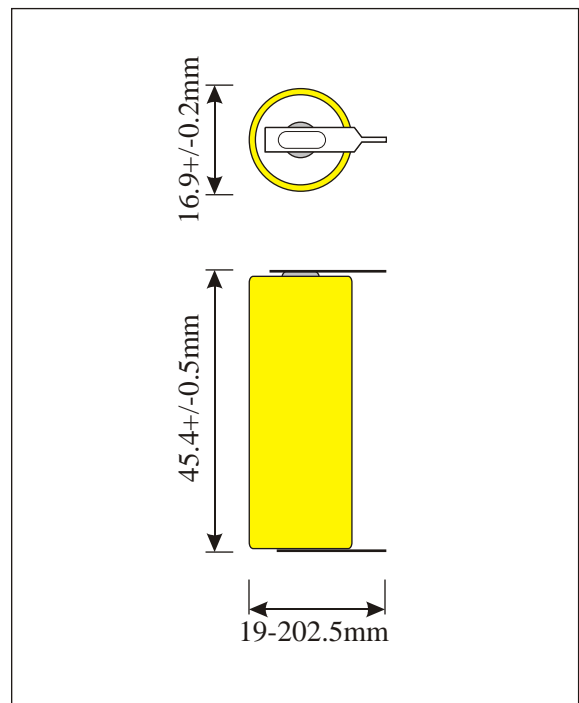


LITHIUM MANGANESE DIOXIDE BATTERY

SPECIFICATIONS

Model	:	CR17450SE-1L2
Description	:	Manganese Dioxide Lithium Battery (LiMnO ₂)
Normal Capacity	:	2400mAh
Nominal Voltage	:	3.0 V
Cut-Off Voltage	:	2.0 V
Weight	:	26 g
Shelf-Life	:	1 year ex-factory
Recommended Drain	:	Standard : 1mA Continuous < 9mA Pulse < 150mA
Operating Temperature Range	:	-40 to +70 degree C
Service Life	:	70hrs at 14mA continuous discharge 145hrs at 9.6mA continuous discharge 2400 hrs at 1mA continuous discharge
Warning	:	Do not short circuit. Do not recharge. Do not overdischarge. Do not disassemble. Do not put on fire. Do not inverse polarity. Do not mix new and old battery. Do not mix with different battery

Typical Discharge Characteristics

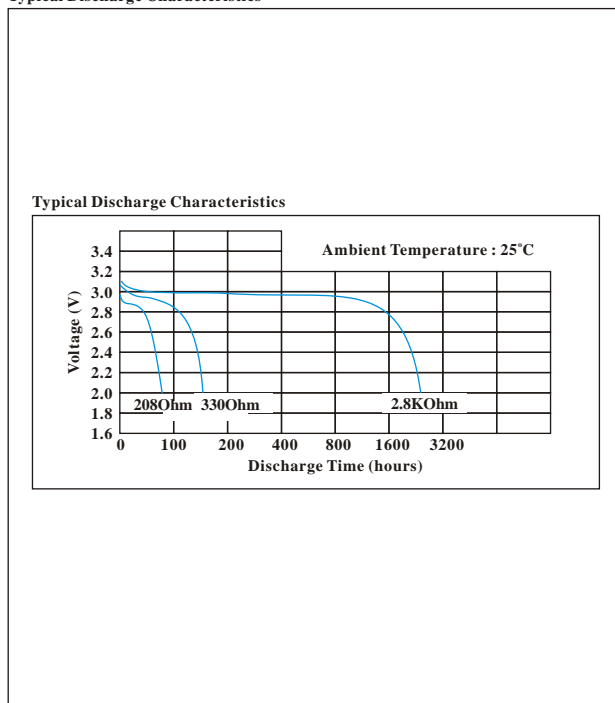

Information is for references only.

Model : CR17450SE-1L2
Version : 2.1

GB CELL

ESA01