
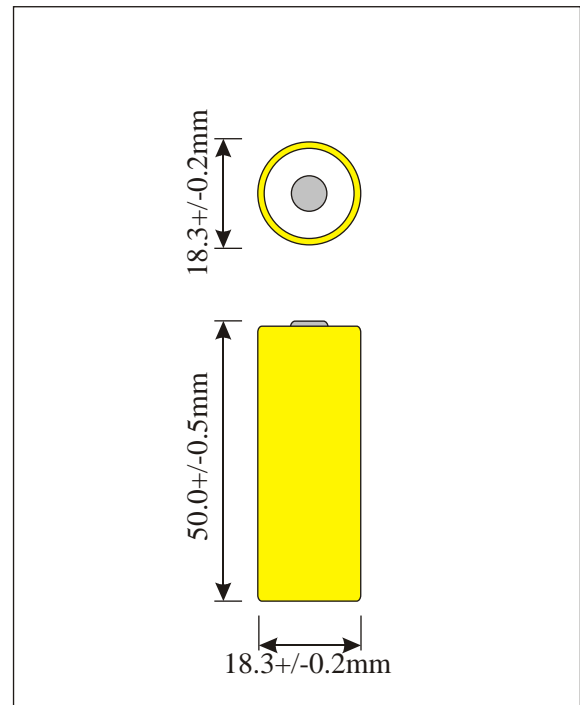


LITHIUM MANGANESE DIOXIDE BATTERY

SPECIFICATIONS

Model	:	CR18505
Description	:	Manganese Dioxide Lithium Battery (LiMnO ₂)
Norminal Capacity	:	2400mAh
Nominal Voltage	:	3.0 V
Cut-Off Voltage	:	2.0 V
Weight	:	35 g
Shelf-Life	:	8 year ex-factory
Recommended Drain	:	Standard : 5mA Continuous < 2000mA Pulse < 3000mA
Operating Temperature Range	:	-40 to +70 degree C
Service Life	:	15hrs for discharge at 20ohm loading 45hrs for discharge at 60ohm loading 92 hrs for discharge at 120ohm loading
Warning	:	Do not short circuit. Do not recharge. Do not overdischarge. Do not disassemble. Do not put on fire. Do not inverse polarity. Do not mix new and old battery. Do not mix with different battery

Typical Discharge Characteristics

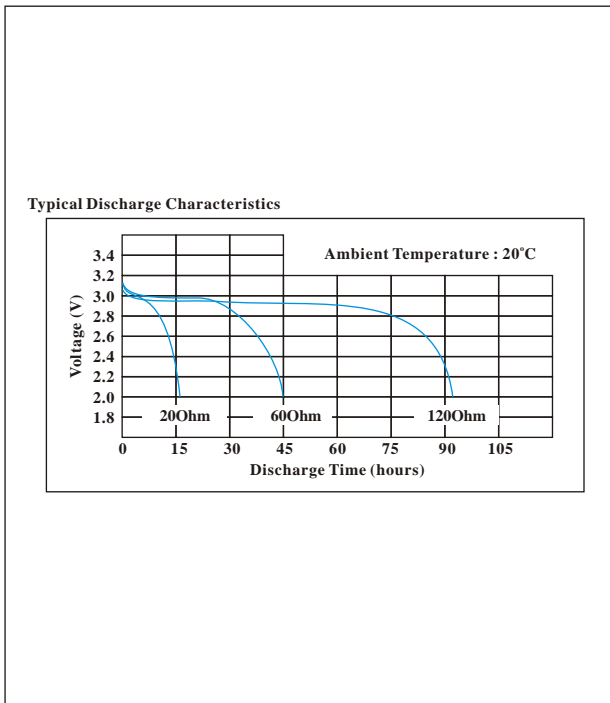

Information is for references only.

Model : CR18505
Version : 2.1

GB CELL

ESE01