
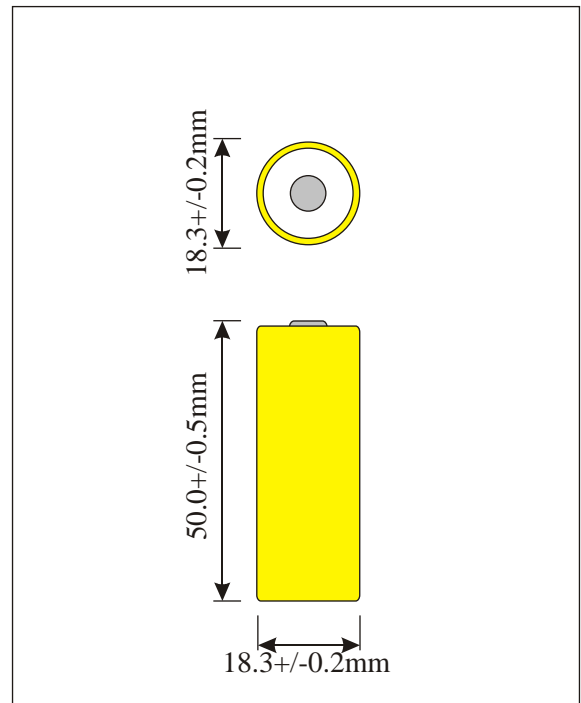


LITHIUM MANGANESE DIOXIDE BATTERY

SPECIFICATIONS

Model	:	CR26500
Description	:	Manganese Dioxide Lithium Battery (LiMnO ₂)
Norminal Capacity	:	5000mAh
Nominal Voltage	:	3.0 V
Cut-Off Voltage	:	2.0 V
Weight	:	62 g
Shelf-Life	:	8 yeasr ex-factory
Recommended Drain	:	Standard : 5mA Continuous < 2000mA Pulse < 3000mA
Operating Temperature Range	:	-40 to +70 degree C
Service Life	:	36 hrs for discharge at 20ohm loading 108 hrs for discharge at 60ohm loading 185 hrs for discharge at 100ohm loading
Warning	:	Do not short circuit. Do not recharge. Do not overdischarge. Do not disassemble. Do not put on fire. Do not inverse polarity. Do not mix new and old battery. Do not mix with different battery

Typical Discharge Characteristics

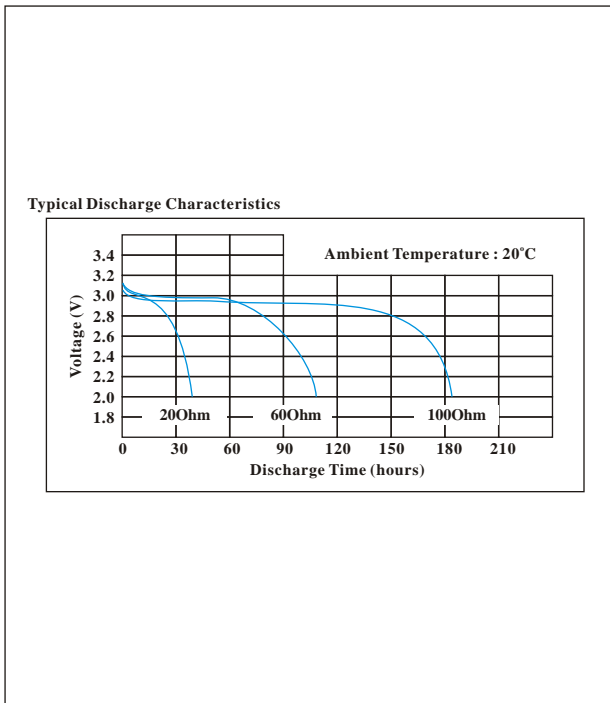

Information is for references only.

Model : CR26500
Version : 2.1

GB CELL

ESF01